

Solid cast iron housing,  
with center support  
Made in the USA

Even-Lok™ bearing provides  
near 360 degree/100%  
interface with shaft

Large diameter rollers for  
optimum capacity

Readily accessible  
mounting screws for  
easy installation

Sealed, pre-lubricated  
bearing eliminates  
most environmental  
contamination

Type E Footprint  
Spherical Insert

Elongated bolt holes  
permit adjustment and  
increased mounting  
options

ME-3000™  
SPHERICALS


MOLINE ME-3000 EVEN-LOK™ SPHERICAL E ROLLER BEARINGS  
WITH TYPE E DIMENSIONS

**SKF** SKF INSERT INSIDE

# FEATURES OF MOLINE ME3000 EVEN-LOK™ SPHERICAL ROLLER BEARINGS WITH TYPE E DIMENSIONS

## WITH SKF® ROLLER BEARINGS

- Supplies near 360° concentric locking around the shaft which eliminates slippage due to vibration

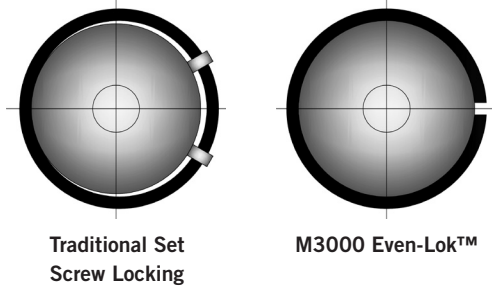

- Compared to traditional set screw locking, concentric locking reduces fretting corrosion
- Excellent choice for screening and conveying, material and air handling, industrial laundry applications, or any application where vibration, slippage or fretting corrosion is a problem
- Distributes locking force equally through Even-Lok™, reducing the risk of local material failure and particle infiltration in the inner sleeve
- Even-Lok™ is reliable, easy and fast to install and dismount
- Units come completely assembled, sealed and pre-lubricated
- Comes with special Allen wrench for easy mounting and dismounting
- Available in shaft sizes from 1 7/16" to 4"
- +/- 1 1/2° misalignment capacity
- Available in Expansion (red tag) and Non-Expansion (yellow tag) styles
- Expansion units have .100" capacity or .030" per foot of shaft
- Standard grease operating temperature is up to 250°, high temperature grease is 350°, additional lubrication options are available, please call the factory for more information
- Available with Standard Double Lip Contact Seal made by SKF®
- Housings available in the standard painted finish, Powder coating in RAL or custom colors, Stainless Steel Powder coating, Nickel Plating, Epoxy and Teflon coatings available upon request
- Custom machining and design is available upon request, please call the factory for more information
- Housings are made of Class 30 cast iron in Illinois and Iowa
- Made in the United States

Standard Double Lip Contact Seal made by SKF®

